


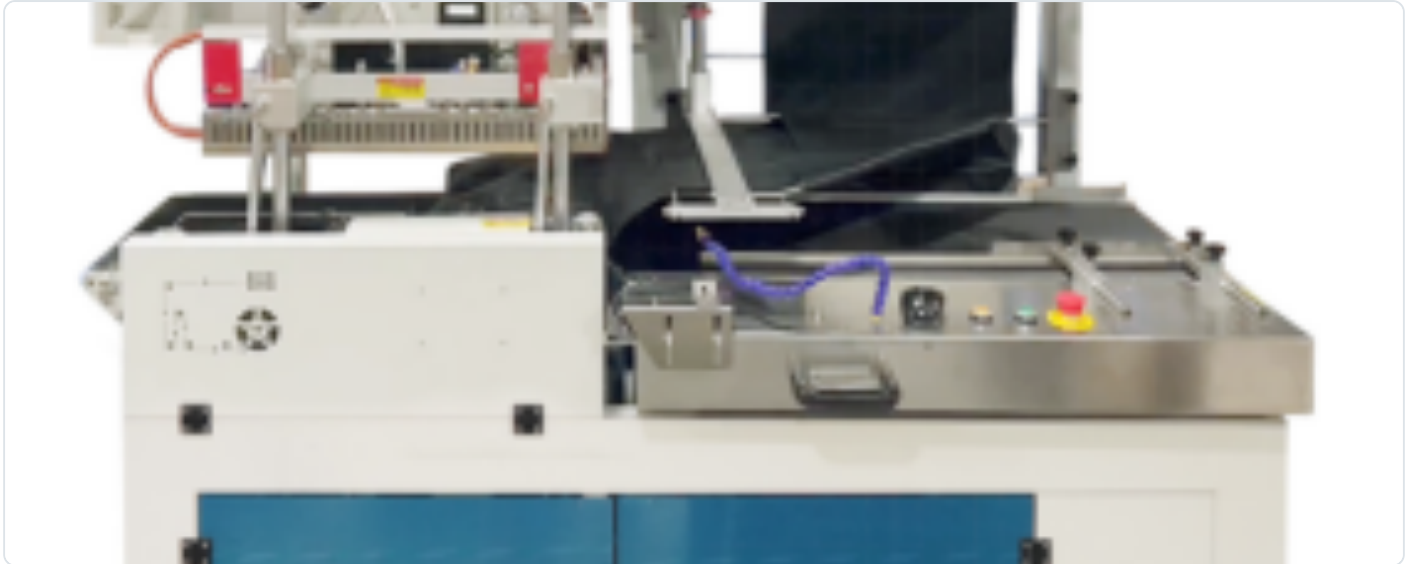

1.2.1 · Right-Size Auto Bagger

YPX-K75A1

Right-Size Auto Bagger with Print & Apply

“Auto-measure, right-size bagging with integrated print & apply”

SPEED

**Up to 20 bags/
min**

PRODUCT WIDTH (MAX)

25.59"

PRODUCT HEIGHT (MAX)

5.71"

WEIGHT

**1,102.31 lbs (500
kg)**

OVERVIEW

The YPX-K75A1 is a right-size auto bagger for high-volume fulfillment lines: product travels horizontally on a conveyor, and the machine measures each item's length on the fly and forms a bag sized to match it, rather than running a fixed bag length for every item.



ANGLE VIEW

DESCRIPTION

The YPX-K75A1 is a right-size auto bagger for high-volume fulfillment lines: product travels in horizontally on a conveyor, and the machine measures each item's length on the fly and forms a bag sized to match it, rather than running a fixed bag length for every item.

Sealing is done with a hot-knife end seal paired with an adjustable seal-and-trim knife that actuates as the product clears the cross seal, so the K75A1 can bag items of varying length at speed without an operator resetting bag length between SKUs.

Film is delivered by a film inverter fed from a conveyor, giving a wide range of usable product height and width, while beginning- and end-of-product sensors keep bag length consistent around each item. The system requires a compressed-air supply (6.0–8.0 kgf/cm²) and accommodates items up to 25.59" wide and 5.71" tall.

An integrated Sato-brand print-and-apply label unit places a shipping or product ID label on the bag at the point of packaging, and interlocked safety covers guard operators from the seal and conveyor zones during the cycle.

KEY BENEFITS

Operating Benefits

- Three-side seal-and-trim for a clean finished package
- High-strength side-seal knife cuts and seals polyethylene with low maintenance
- Automatic product-length detection right-sizes each bag
- Operating speed up to 20 cycles/min
- Closing conveyor for gentle handling of soft products; soft-start conveyor for singles or multi-item batches
- Integrated Sato label printer applicator for shipping or product labels

Set-Up Benefits

- Straightforward integration into an existing production line
- Handles polyethylene film up to 3 mil, including poly-mailer stock

Maintenance Benefits

- Reinforced mechanical components for demanding duty cycles
- Recordable, calibratable seal-temperature adjustment

Safety Benefits

- Interlocked safety covers restrict access during operation
- Zero-force seal bar closing
- ISO 9001-aligned design

TECHNICAL DATA

Model	Right-Size Auto Bagger
Speed	Up to 20 bags/minute
Product Width (max)	25.59"
Product Length (max)	29.53"
Product Height (max)	5.71"
Air Requirement	6.0 – 8.0 kgf/cm²
Power	3,500 W
Electrical	110/220V, 50/60Hz
Dimensions (W x D x H)	86.61" x 43.31" x 59.06"
Weight	1,102.31 lbs (500 kg)

Requires facility compressed-air supply; integrated Sato print & apply label unit.

Interested in the YPX-K75A1?

Contact YXPXPACK for pricing, lead times, and a live demo.

sales@ypxpack.com
ypxpack.com
Guangzhou, Guangdong, China